

### RDC-2X3-6C

**Dimensions w/ intake(s):** 57D" x 69W" x 192H"

**Base Weight:** 4,568 lbs.

*Includes base collector & HLL containment*

**CFM:** 12,500

**HP:** 40

**Full Load Amps @ 480 V:** 52 FLA

**Static Pressure:** 10 in. wg

**Filter Cartridges:** (6) PL-14D52-A15-SF21

**Comparable Filter Media:** 2,790 sq. ft.

#### Equipment

#### Video Link

**Controls:** ePro 7" touchscreen for ease of use.

**Heavy Duty Construction:** Fully welded 7 & 11 gauge steel

**Pulsing System:** 16 SCFM

**Filter Design:** Included as standard to improve filter life and reduce energy consumption

**Blower/Motor Combination:** Designed for energy efficiency

**SafeSensor Particulate Monitor:**

Detects leaks past the filters

**Air Intake:** Reduces airspeed allowing heavy dust to fall away from filters.

- SAP: Metal mesh/baffle intake - Standard
- Ducted Intake: Optional

**Warranty:** 15 years on the cabinet; 5 years on components (See warranty document for details)

**Fire Suppression (optional):** FM-200, CO<sub>2</sub>, water

**Vortex Plenum:** With adjustable nozzles


**After Filters (optional):** HEPA\* or active carbon

**Containment:** Various containment options including a dust tray, HSL, HLL

**ICE Package (optional):** Air conditioning coil and condenser package

\*HEPA filters option reduces airflow down to 8,200 CFM

#### Specifications

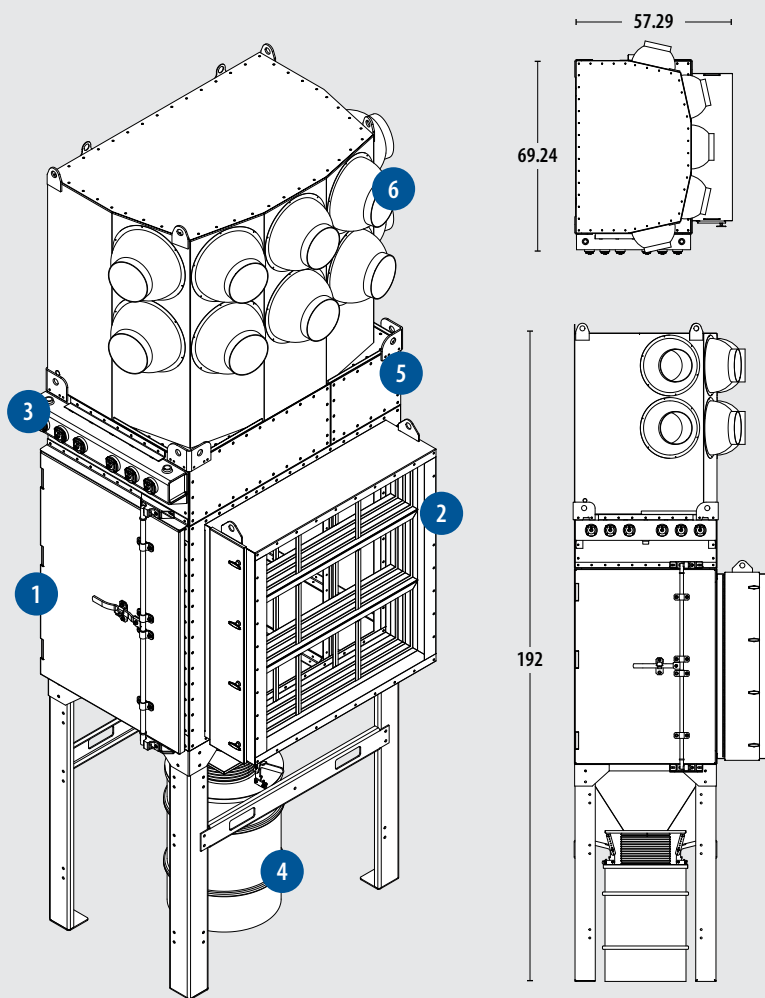

1 Filter Cabinet Assembly

2 Air Intake

3 Advanced Pulsing System

4 Dust Containment Options (HLL Shown)

5 SafeSensor Particulate Monitor

6 Vortex Top Plenum: Exhaust Plenum with Adjustable Louvers